Axicon 6525S

Especificaciones Técnicas

Características

Incluye un total de 100 secuencias de verificación por segundo

- Verificación compatible con ISO/IEC
- Ligero y portátil
- Apertura automática variable
- Configurable por el usuario

El verificador Axicon 6525-S está diseñado para comprobar barras lineales con una anchura máxima, incluyendo zonas silenciosas, de 125 milímetros. Esto significa que sólo un verificador es necesario para controlar todos los GS1 códigos EAN/UPC, ITF-14 y GS1-128 si el caso externo y los códigos de barras de la etiqueta de la logística no son en su talla máxima. Para cualquiera de las etiquetas de código de barras con un 100mm (4 pulgadas) de ancho de impresión, este verificador es perfecto. También se puede utilizar para comprobar el código 39, Código 128, HIBC, CIP, PZN y otros códigos.

Características y beneficios

La "S" de los verificadores Axicon tiene una función de exploración, lo que significa que por lo menos puedes obtener diez lecturas diferentes en toda la altura del código de barras (como requerido por ISO/IEC) es mucho más rápido. Simplemente coloque el verificador ligeramente por encima o por debajo del código de barras, pulse el disparador y deslice el comprobador en el código, en menos de un segundo puede tener resultados de hasta 100 lecturas del código en diferentes puntos de la altura de la barra.

.

Software

Diseñado para funcionar con cualquier PC con cualquier versión compatible de Microsoft Windows. El software está siempre actualizado para cumplir con los requisitos de GS1. Las Especificaciones Generales, y está disponible de manera gratuita en nuestro sitio web.



Axicon 6525S

Especificaciones Técnicas

Software specifications


Symbologies verified	EAN-8, EAN-13 and UPC-A (with or without add-ons), UPC-E, GS1 DataBar (all symbols), ITF-14, GS1-128, Code 39, Code 93, Code 128, Codabar, ITF, MSI Plessey, (all symbols no wider than 125 mm)
Application standards	AIAG, Belgian Pharmacodes (MSI and Unique), CIP39, Coupon Codes (UK, USA, Euro), GS1 Application Identifier Check, HIBC, ISBN/ISSN, Italian Pharmacode (IMH), LPPR, M&S, PZN, SISAC, Variable Measure Codes (Branded, Instore, Australian).
Analysis	All ISO/IEC parameters, ANSI option, decodability per symbol character, nominal x-dimension, average bar gain, check digit validation, print contrast measurement (PCS), wide-to-narrow ratio, symbol structure, quiet zones.
Calibration logging	Record of date and time for ISO 9001 records
Configurable options	Simplified pass/fail display, number of scans per verification, pass grade, print and file save options, audible warnings, calibration reminder, check digit validation, report generation tool, GTIN validation (with appropriate database). CSV file saving, user data, data checking for various applications


Hardware specifications

Dimensions	145 x 113 x 128 mm (5.7" x 4.4" x 5.0")
Weight	675 g (23.8 oz)
Construction	Aluminium, CCD sensor, LED illumination
Interface and power consumption	USB 2.0 150mA at 5v.
Aperture reference numbers	05, 06, 10, and 20
Wavelength of light	660 nm
Maximum scan width	125 mm (4.9")

General information

Regulatory approvals	CE marking (compliant with RoHS and EMC directives) Compliant with ISO/IEC 15416 and ISO/IEC 15426-1 Can meet the requirements of 21 CFR part 11.
Operating range	Operating temperature: 10° to 40°C Storage temperature: -20° to 70°C Relative humidity: 25% to 80% @ 40°C non-condensing.
Warranty	Two years parts and labour - return to bench.

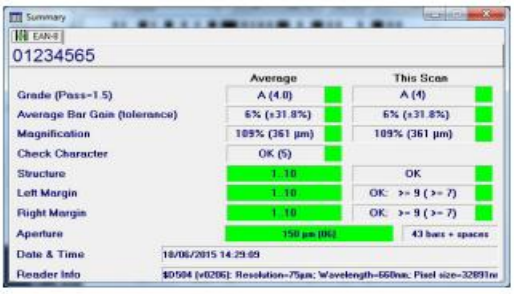

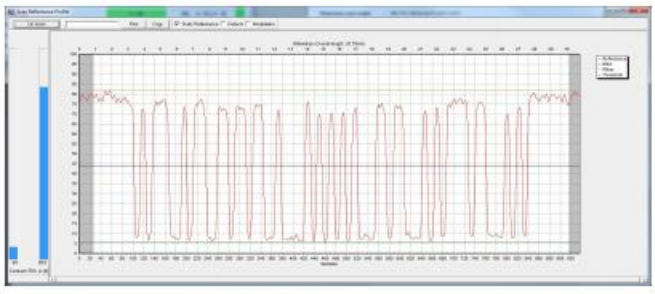

All trademarks are acknowledged as belonging to their respective companies.
As Axicon continually improves its products, the specifications and features explained here are subject to change without notice.

DISTRIBUIDOR AUTORIZADO:

AVERY DENNISON · AXICON · brother · DATALOGIC · Dynapos · EPSON · GS1 Colombia · Honeywell · Intermec by Honeywell · ZEBRA · Monarch Products and Services · unitech · net LogistiK Tecnología que genera resultados · siesa LOGyCA

CALI: Calle 38 AN No. 4N - 183 PBX: 665 1117 - 315 4917470 **MEDELLÍN:** Carrera 73 A No. 31 A - 78 PBX: 235 2205 – 448 9971
servicioalcliente@etimarcas.com – www.etimarcas.com